



背面図 / DANTE Connectivity

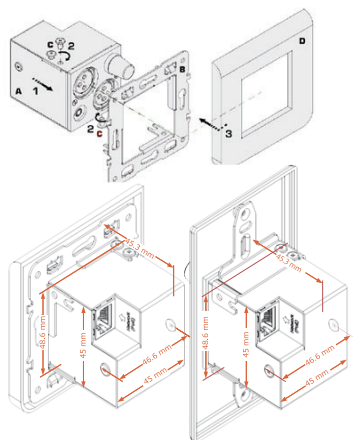

AuviTran製品を使用したDanteネットワークの例

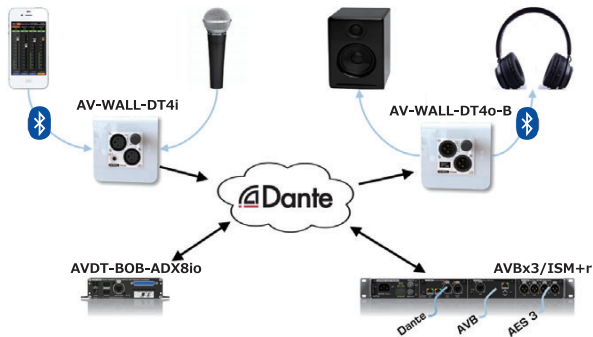

Technical Data

	AV-WALL-DT4i series	AV-WALL-DT4o series
DIMENSIONS	45 x 45 x 50 mm (excluding Frame)	
POWER SUPPLY	PoE 802.3af compliant through RJ45	
CONNECTORS	2 x XLR for Mic/Line, 1 x 3.5mm Stereo-Minijack Line in, 10 - Pin Bluetooth plug	2 x XLR Line output, 1 x Stereo Bluetooth on AV-WALL-DT4o-B or 1 x 3.5mm Stereo-Minijack Line out on AV-WALL-DT4o-LE
SAMPLING, A/D	44.1 / 48 / 88.2 / 96 kHz, 24 or 32 Bits	
DYNAMIC RANGE	>101dB A-weighted (XLR), >100dB A-weighted (Minijack)	>106dB A-weighted (XLR), >104dB A-weighted (Minijack)
INPUT SENSIBILITY	+24dBu to -40dBu (XLR), +12dBu to -28dBu (Minijack)	-
OUTPUT LEVEL	-	+24dBu (XLR), +18.7dBu (Minijack)
PHANTOM POWER	48V per channel	-
DISPLAY	-	OLED screen on AV-WALL-DT4o-B
LOCAL CONTROL	Rotary push button on AV-WALL-DT4i	Rotary push button on AV-WALL-DT4o-B
REMOTE CONTROL	Remotely controlled via AVS-Monitor	
OPTIONS AVAILABLE	AV-WALL range is available in BLACK Customization / OEM possible Bluetooth extension available(AV-WALL-DT4i series only) Interchangeable wall plate type on request	

Reference / Part Numbers

AV-WALL-DT4i	Dante super compact Mic/Line interface on PoE for wall mount with 2x XLR mic inputs, 3.5mm mini jack stereo input and a rotative push button for local control
AV-WALL-DT4i-LE	Dante super compact Mic/Line interface on PoE for wall mount with 2x XLR mic inputs, 3.5mm mini jack stereo input
AV-WALL-DT4o-B	Dante super compact interface on PoE for wall mount to 2x XLR line out and stereo Bluetooth output with a rotative push button plus OLED screen display
AV-WALL-DT4o-LE	Dante super compact interface on PoE for wall mount to 2x XLR line out and 3.5mm mini jack stereo output
AV-WALL-BT-EXT	Optional Bluetooth extension for DT4i series only



AuviTran 製品 日本正規輸入代理店
 Laguna Hills, Inc.
 株式会社ラグナヒルズ
 〒102-0083
 東京都千代田区麹町3-5-2 BUREX麹町
 TEL:03-3238-6391
 FAX:03-3238-6399


AuviTran 製品 販売・問い合わせサポート先
Digicom
 有限会社デジコム
 〒454-0012
 名古屋市中川区尾頭橋3-11-15
 TEL:052-324-8385
 FAX:052-324-8386

AuviTran - France

All trademarks are acknowledge as the property of their respective owners

www.auvitran.com

Specifications and appearance are subject to change without notice

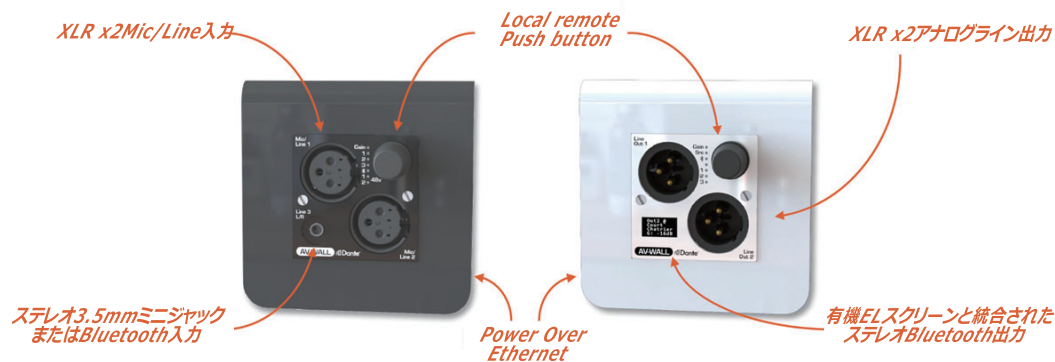

AV-WALL by AuviTran

ウォールマウント用 コンパクトDanteインターフェース



All trademarks are acknowledge as the property of their respective owners

www.auvitran.com

AV-WALL-DT4i シリーズ

ウォールマウント用 Dante Mic/lineまたはBluetoothオーディオ入力インターフェース

※ほぼ原寸大



AV-WALL-DT4i



AV-WALL-DT4i-LE

AV-WALL-DT4iは、ウォールマウント用のDante Mic/Line入力インターフェースであり、最大4ラインのマトリクスミキサー機能を内蔵しています。

フロントパネルにはプリアンプ付きのマイク入力端子を2つ搭載しており、ステレオミニジャックはラインレベルで40dBのゲインを提供します。

マイクのプリアンプ調整はリモートまたはローカルで行うことができ、1dBステップごとに調整することができます。また、PoEに対応しておりCat5e/6ケーブル1本のみで電源・制御・オーディオデータの伝送が可能です。


AV-WALL-DT4i-LEは、AV-WALL-DT4iと同じ機能を有しておりますが、ローカルアクセスおよび制御のための回転押しボタンがございません。

オプションのBluetoothステレオ入力モジュール(AV-WALL-BT-EXT)を接続する事で、BluetoothからDanteへの直接接続も可能になります。

主な特徴

- ・4チャンネルのDante送信に対応
- ・内部に4x4チャンネルのマトリクスミキサー搭載
- ・リモートまたはローカルで制御が可能
- ・45x45mmのコンパクトサイズ
- ・Mic入力端子には+48Vファンタム電源搭載
- ・PoE対応(802.3af準拠)
- ・XLRメスMic/Line入力端子 x2系統
- ・3.5mmミニジャックLine入力端子 x2系統

オーディオミキシングフローチャート

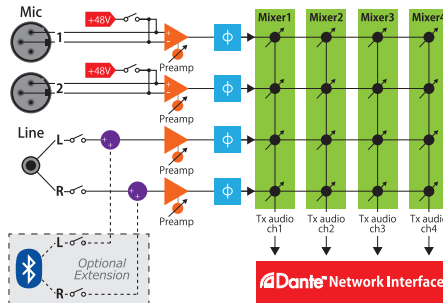

利用可能なオプション

- ・カラーはホワイトとブラック
- ・Bluetoothステレオ入力機(AV-WALL-BT-EXT)
- ・ご要望に応じて、ウォールプレートは交換可能
- ※海外にて受注生産



AV-WALL-DT4o シリーズ

ウォールマウント用 ステレオBluetoothまたはミニジャックを備えたDante アナログXLR出力インターフェース

※ほぼ原寸大



AV-WALL-DT4o-B



AV-WALL-DT4o-LE

AV-WALL-DT4o-Bは、ウォールマウント用のDante / Bluetooth出力インターフェースであり、回転押しボタンを使用することで簡単にペアリングすることが可能です。

ユーザーはペアリングされたデバイスを、有機ELスクリーン上で選択/表示することができます。ゲインはローカルまたはリモートで制御できます。


また、PoEに対応しておりCat5e/6ケーブル1本のみで電源・制御・オーディオデータの伝送が可能です。

AV-WALL-DT4o-LEは、Bluetooth出力に代わってステレオミニジャック出力を搭載しており、回転押しボタンと有機ELスクリーンはございません。

主な特徴

- ・リモートまたはローカルで制御が可能
- ・45x45mmのコンパクトサイズ
- ・PoE対応(802.3af準拠)
- ・XLRオスアナログLine出力端子 x2系統
- ・3.5mmミニジャックLine出力端子 x2系統 (AV-WALL-DT4o-LEのみ)
- ・簡単にBluetoothのペアリングが可能 (AV-WALL-DT4o-Bのみ)
- ・Danteのソースを有機ELスクリーンより直接選択可能 (AV-WALL-DT4o-Bのみ)

オーディオミキシングフローチャート

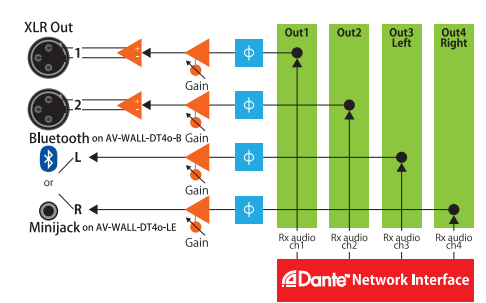

利用可能なオプション

- ・カラーはホワイトとブラック
- ・ご要望に応じて、ウォールプレートは交換可能
- ※海外にて受注生産

